


Effetto 1 narrow beam - 4000K - Light grey

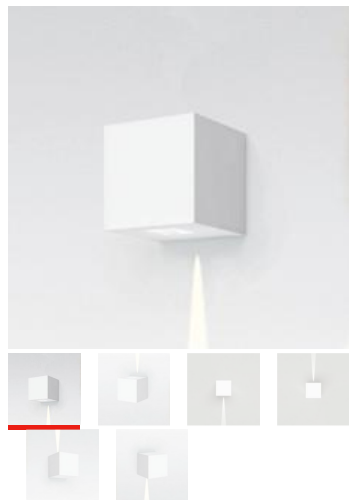

DESIGN BY:

Artemide
2011

MATERIALS:

Die-cast aluminium, reinforced polymer, PMMA

DESCRIPTION:

Light fixture with 1 light beam using monochromatic LED light source characterized by neutral colour temperature (4000K) together with a light-diffusing lens which optimize the optical performance of the beam and establish its width. Designed to create geometric lights of scenic effect, it has 1 narrow beam of 15°. Wall installation. Composed by lighting cap unit and terminal board fixed together by means of locking dowels. Cap in die-cast EN AB-47100 aluminium. Terminal board in reinforced polymer. Watertight gasket in silicone rubber. Locking dowels used outside the fixture in AISI 316 stainless steel. PMMA lens siliconed flush with the cap to obtain the beam angle opening.

Wiring to be carried out inside the terminal board by piercing an IP65 membrane grommet suitable for cables with a diameter of 6-13 mm. Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Effective power 2,7W.

SELECT


LED

Light grey

PRODUCT CODE

T42021NN00

Light emission



TECHNICAL DATA SHEET

FEATURES

Product name:	Effetto 1 narrow beam - 4000K - Light grey
Article Code:	T42021NN00
Colour:	Light grey
Material:	Die-cast aluminium, reinforced polymer, PMMA
Series:	Outdoor
Environment:	Outdoor
Area contract:	Outdoor Urban, Outdoor Facade, Private Residence

OPTICS

Emission:	Indirect
-----------	----------

DIMENSIONS

Length:	cm 14
Width:	cm 14
Height:	cm 14
Impact Resistance:	IK10
Glow Wire Test:	650 °


LAMPS INCLUDED

Category:	LED
Watt:	4,6W
Luminous Flux (lm):	190lm
Typology:	1
Color temperature (K):	4000K
Class:	A

LUMINAIR

Starter:	Electronic Integrated
Watt:	4,6W
Voltage:	220V-240V

DIMENSIONS




COLOUR



DIAGRAMS

Polar curve

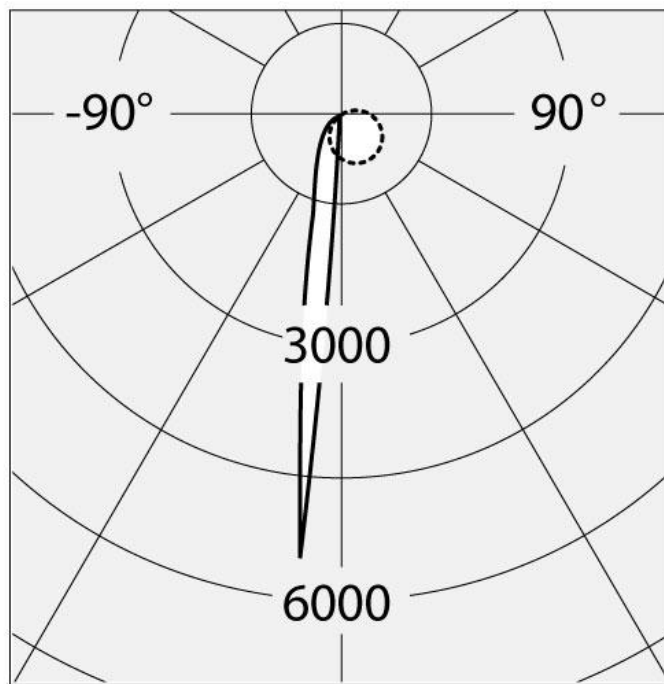

— $C=0^\circ-180^\circ$ Cd/Klm
· · · · · $C=90^\circ-270^\circ$

Light beam $> 1 \times 15^\circ$

